



## EUROPA C

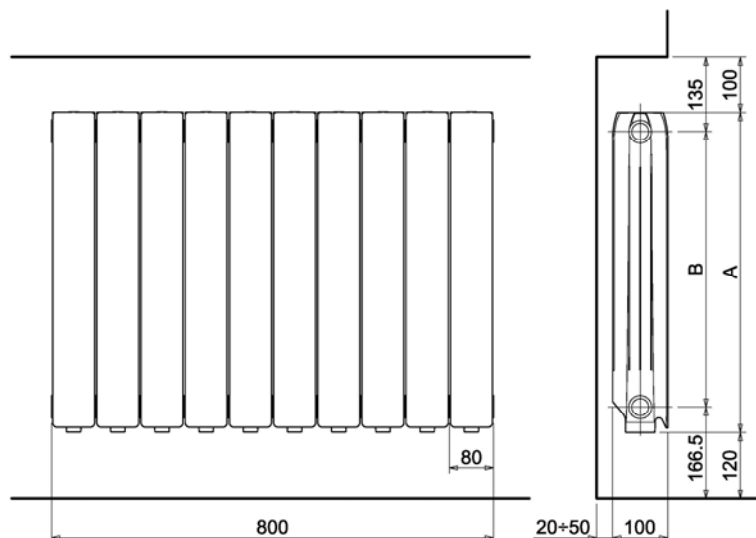

	Dimensiones		Emisión térmica UNE EN 442			Exponente n	Coeficiente Km	Presión máxima de funcionamiento bar
	A	B	T=50° C W	T=40° C W	T=30° C W			
<b>EUROPA 450 C</b>	431	350	89,2	67,1	46,46	1,27784	0,601947	6
<b>EUROPA 600 C</b>	581	500	119,8	89,2	61,07	1,31869	0,688627	6
<b>EUROPA 700 C</b>	681	600	137,1	102,2	69,99	1,31598	0,796525	6
<b>EUROPA 800 C</b>	781	700	158,0	117,6	80,46	1,32052	0,901564	6
<b>EUROPA 900 C</b>	880	800	164,2	122,8	84,44	1,30217	1,0071	10

## XIAN N

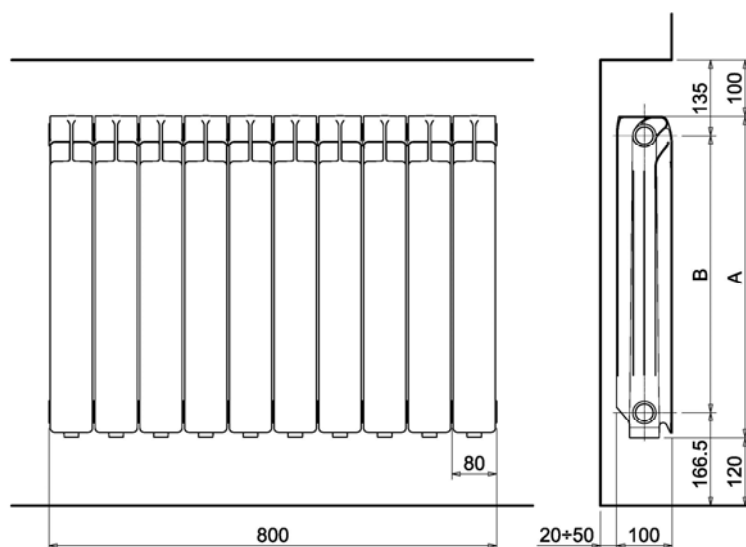

	Dimensiones		Emisión térmica UNE EN 442			Exponente n	Coeficiente Km	Presión máxima de funcionamiento bar
	A	B	T=50° C W	T=40° C W	T=30° C W			
<b>XIAN 450 N</b>	431	350	90,8	67,83	46,60	1,30483	0,55081	6
<b>XIAN 600 N</b>	581	500	122,9	91,66	62,08	1,31423	0,71897	6
<b>XIAN 700 N</b>	681	600	142,2	105,62	72,00	1,33400	0,77016	6
<b>XIAN 800 N</b>	781	700	160,2	119,93	81,00	1,33487	0,86447	6